




BHARAT AC (SINGLE SOCKET)

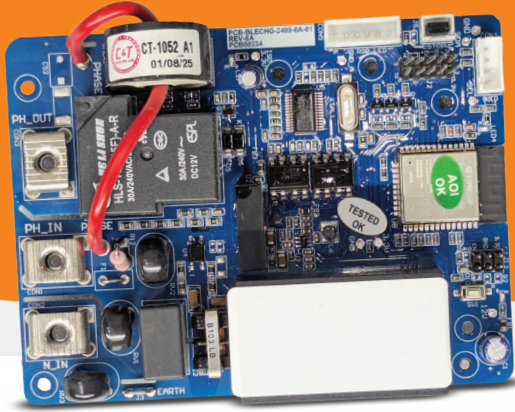

3.3
kW

Configurable
Capacity



IEC 60309

TECHNICAL SPECIFICATIONS

Input power

Supply Voltage	230 VAC \pm 10% (P+N+PE)
Frequency	50Hz and 60Hz

Output Power

Total Output	1 Nos (Max 3.3kW)
Supported Connector	Industrial Socket/ Bharat AC, IEC 60309
Output Configurations	3.3 kW, 16A x 1

Communication

Protocol	OCPP 1.6j
Network	WiFi / 4G (fall back to 2G)
Standards	IEC61851 IS17017 IEC/EN 61000

Interface

Supported Display	1.3" OLED Display
Supports	RFID and OTA
Metering	On Board Class-1 Energy Metering
Protection	Configurable over current, over voltage, under voltage, and surge protection

Mechanical

Operating Temperature	-20°C to 70°C
Storage Temperature	-20°C to 70°C
Humidity	5% to 95%
Dimension (LxBxH)	116.74 x 87 x 30 mm
Weight	148 g

FEATURES

- Up to 3.3kW Output Capacity.
- Configurable for Single Industrial Output Socket.
- Support 1.3" OLED Display.

APPLICATIONS



e2w
Electrical Two Wheeler



e3w
Electrical Three Wheeler