




BHARAT AC (THREE SOCKET)

10
kW

Configurable
Capacity



IEC 60309

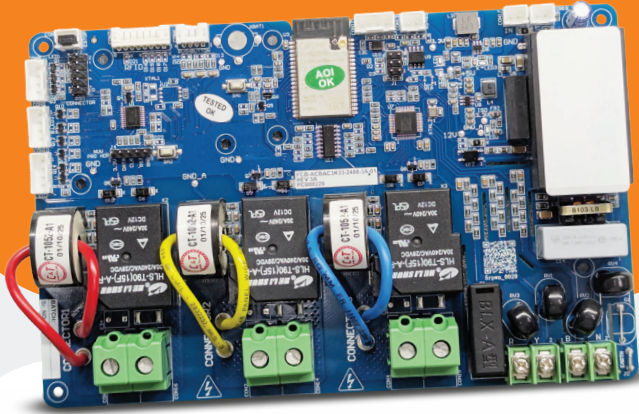

TECHNICAL SPECIFICATIONS

Input power

Supply Voltage	415 VAC \pm 10% (3P+N+PE)
Frequency	50Hz and 60Hz

Output Power

Total Output	3 Nos (Max 10kW)
Supported Connector	Industrial Socket/ Bharat AC, IEC 60309
Output Configurations	3.3 kW, 16A x 3

Communication

Protocol	OCP1.6j
Network	WiFi / 4G (fall back to 2G)
Standards	IEC61851 IS17017 IEC/EN 61000

Interface

Supported Display	4.3" Graphical LCD Display 20 X 4 Character Display
Supports	RFID and OTA
Metering	On Board Class-1 Energy Metering
Protection	Configurable over current, over voltage, under voltage, and surge protection

Mechanical

Operating Temperature	-20°C to 70°C
Storage Temperature	-20°C to 70°C
Humidity	5% to 95%
Dimension (LxBxH)	185 x 117.15 x 27.5 mm
Weight	370 g

FEATURES

- Up to 10kW Output Capacity.
- Configurable for Three Industrial Output Sockets.
- Support 4.3" Graphical or 20 X 4 Character Display.
- Enabled for RFID Authentication and LED Indicators.

APPLICATIONS



e2w
Electrical Two Wheeler



e3w
Electrical Three Wheeler



+91-9016028817



systems@bacancysystems.com



bacancysystems.com