


LED ADDON

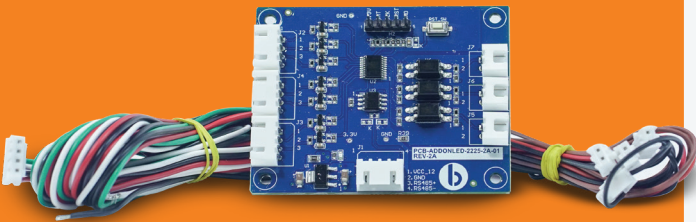

FEATURES

- ◆ Power efficient with a quick response time.
- ◆ Digital input for fault detection, SPD smoke, and tampering.

APPLICATIONS



Status of the charger | Fault indication.

TECHNICAL SPECIFICATIONS

Input power

Input Voltage	12V DC @2A
Power Consumption	24 W

Output

Connector	3 Nos. (RGB)
-----------	--------------

Interface

LED	Digital Input
-----	---------------

Mechanical

Protocol	RS 485 (Modbus)
Operating Temperature	-20°C to 80°C
Storage Temperature	-20°C to 80°C
Humidity	5% to 95%
Dimension (LxB)	70 × 55 mm
Weight	< 100 g



+91-9016028817



systems@bacancy.com



bacancysystems.com